

Ideal for:  
Tyre Hotels  
Tyre Centers  
Tyre Dealers  
Car Manufacturers  
Car Dealers

# Easy Stacker 800

Save  
time  
Improve  
safety



## Professional tools for handling sets of car tyres

- With a unique safe grip
- Can place sets of tyres very closely
- Can optimize the capacity of stock
- Move and handle with safety and effectivity
- Customization available



Experts in Tyre Handling Equipment



# Easy handling sets of car tyres

Developed for safe and efficient handling of sets of car tyres and with focus on effective use of space to optimize stock capacity.


## Capability

With a gripping range of Ø400 - 800 mm (16 - 31") and a lifting capacity of 160 kg (352 lbs), the Easy Stacker 800 can handle almost any car tyre with or without rims in sets of 4.



### In stock facilities

With a secure and firm grip and with movements optimised for tight spaces, the Easy Stacker 800 can place sets of tyres close to each other to optimize the stock capacity.

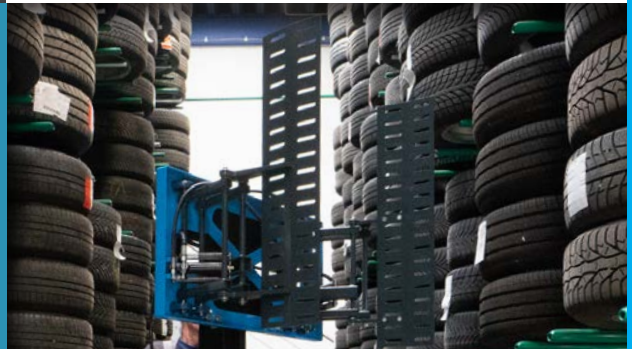

### In workshops

Lift and move stacks of tyres and wheels from the storage facilities to the workshop and vice versa without any manual and stressful operations. With a firm grip and by use of a small electrical stacker or small forklift.



1

Can be installed on existing electrical stacker. To be build-in in existing single or double acting hydraulic systems. Requires the hydraulic to be run through mast. Delivered with hydraulic diverting valve, control box and Class 2 mounting blocks.

2

Can be installed on existing electrical stacker, but delivered with a build-in PowerPack (self-contained hydraulic system) incl. complete control system and Class 2 mounting blocks. Require an electrical supply for the PowerPack.

3

Can be delivered as a "READY TO GO" turnkey solution incl. electrical stacker. Standard lifting height is 3.20 m or 4.35 m. Can be further customized regarding lifting height of stacker.



## Standard features

Designed to work on a small electrical stacker or forklift in order to reduce manual and stressful operations

Can handle sets of tyres stacked very closely together to optimize stock capacity

Provides a firm grip of the tyres to improve a safe handling from stock systems

Can lift and move sets of tyres from stock to workshop and vice versa



Protect employees against potential injury risks




Small and slim footprint

## Optional features

The length of the gripping panels can be customized to your requirements

Can be customized to handle rims

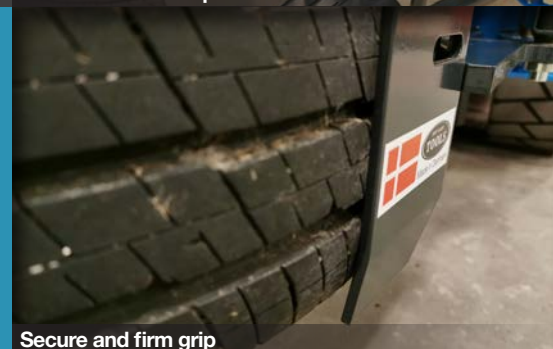


Secure and firm grip

## Technical Specifications

Weight:	70 kg (154 lbs)
Lifting capacity:	160 kg (352 lbs)
Tyre diameter:	400 - 800 mm (15-31")
Grip length:	950 mm (37") can be customized
Attachment:	ISO/FEM/ITA Class 2

## Technical Requirements

Lifting capacity:	Minimum 250 kg depending on carrier
Hydraulic:	1 single or double acting hydraulic valve
Electrical supply (only if delivered with PowerPack):	24V / min 10A

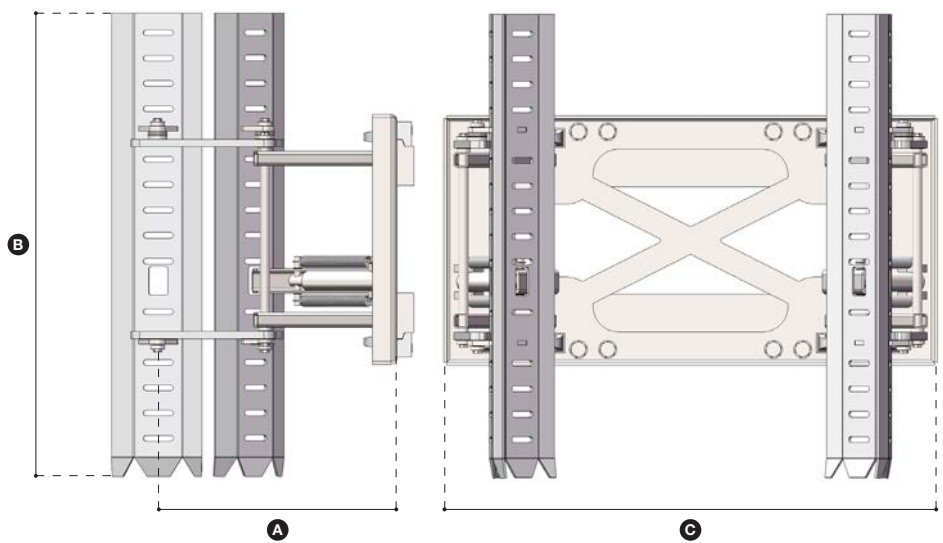

<b>A</b>	500 mm (20")
<b>B</b>	950 mm (37")
<b>C</b>	1.000 mm (39")

Authorized Dealer



+45 72 344 344  
info@justeasytools.dk  
www.justeasytools.com  
VAT no.: DK33644809

Just Easy Tools ApS  
Nupark 51  
DK-7500 Holstebro  
Denmark